



making waves in a  
wire-free world


# GEO 84Z

8/4 line alphanumeric pager




## The Big Screen Alternative

Scope has done it again! Another first to market with a product that's on everybody's wish list. A frequency programmable, 8 line text pager that you can operate and read without the aid of a magnifying glass.

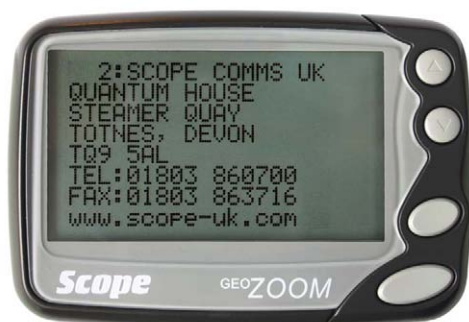

8 line mode (3 mm text height)

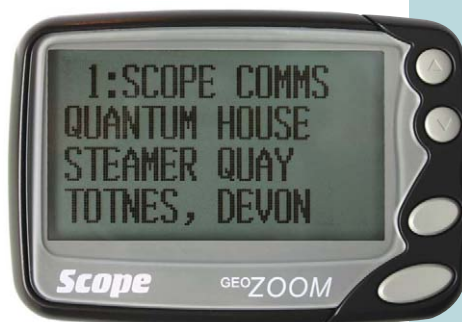

4 line mode (6 mm text height)

## features

The 84Z Geo Zoom has 8 lines of big clearly readable text, or if you want, 4 lines of REALLY BIG HIGH VISIBILITY CHARACTERS. For low light conditions, cool blue backlighting further enhances the viewing experience.

- Frequency Programmable
- Selectable Character Height, 3 or 6 mm
- 20,000+ Character Memory
- Hand Program Frequency & Address
- Urgent Call Alert Mode
- BS5839-1: 2002 Compliant\*

\*with regard to fire paging systems for the deaf

# GEO 847

8/4 line  
alphanumeric pager



## Specification

<b>Display:</b>	High Contrast Dot Matrix LCD: 8 Line or 4 line Zoom Display
<b>Addresses:</b>	8 addresses (individually selectable Off/ Tone/Numeric/ Alpha)
<b>Messages:</b>	60 messages, up to 20,000+ characters
<b>Size:</b>	77 (L) x 53 (W) x 19 (D) mm
<b>Weight:</b>	56g (without battery)
<b>Frequency ranges:</b>	Synthesized 440- 470 MHz (see ranges below)
<b>Signalling protocol:</b>	POCSAG
<b>Data transmit rate:</b>	512, 1200 or 2400 baud
<b>Sensitivity:</b>	5 $\mu$ V/m @ 512 baud, 7 $\mu$ V/m @ 1200 baud
<b>Beeper output:</b>	Better than 80 db @ 30cm
<b>Power:</b>	Single AAA (LR03) battery
<b>Model Suffix:</b>	Frequency range K 442-448 MHz L 448-454 MHz M 454-460 MHz N 460-466 MHz P 466-472 MHz

Operation is simple and unfussy.  
All functions are selectable by icons  
clearly displayed on the big screen.

## Main features

- **Address & frequency hand programmable (password protected)**
- **Storage:** Repeat message rejection: optional 1,2,5,10 minutes or disabled
- **Low Battery indicator**
- **Out of Range (NO Service) Indicator**
- **Repeat Message Indicator**
- **Error Message Indicator**
- **Unread Message Indicator**
- **Alert Modes:** Vibrate, Tone, Quiet Tone & Mute
- **Alert Length:** 8, 16, 32 or 64 second programmable
- **Urgent Call (Tone + Vibrate)**
- **Real Time Clock with Alarm**

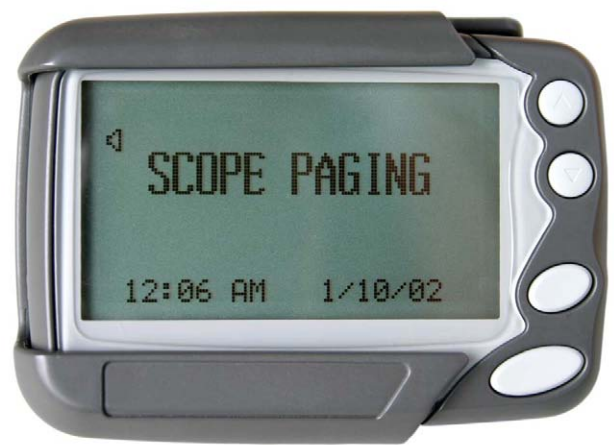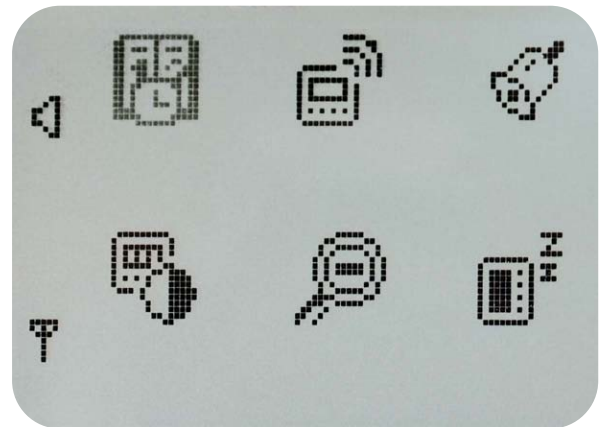

Fitted in optional splash-proof housing



Scope Communications UK Ltd  
Quantum House  
Steamer Quay  
Totnes, Devon, TQ9 5AL  
England

Tel: +44 (0)1803 860700  
Fax: +44 (0)1803 863716  
Website: [www.scope-uk.com](http://www.scope-uk.com)  
Email: [sales@scope-uk.com](mailto:sales@scope-uk.com)

© Scope Communications Uk Ltd.  
All specifications subject to change. E & OE.